Kirloskar 'Angel' Domestic Pumps

Single Stage, High Speed, Self Priming, Horizontal, Regenerative, Monobloc Pumps.

Range

Head	:	6-28 metres
Capacity	:	2900 - 400 litres per hour
Power Rating	:	0.37 kW (0.50 HP)

material of Co	•• /							
Standard Supply								
Impeller	:	H.T. Brass						
Delivery Casing	:	Stainless Steel						
Motor Body	:	Aluminum						
Mounting Casing	:	Aluminum						
Shaft	:	Stainless Steel						

Material of Construction

Direction of Rotation

Clockwise, when viewed from motor side.

Approximate performance of Kirloskar 'Angel', 2 Pole, Monobloc Pump, at Rated Voltage, 50 Hz, Single Phase A.C. Power Supply:

PUMP MODEL		NER ING		SIZE m)		TOTAL HEAD IN METRES						
	kW	НР	cuc	DEL.	6	10	14	18	22	26	28	VOLTAGE (VOLTS)
	ĸvv	пр	SUC.	DEL.	CAPACITY IN LITRES PER HOUR							
KIRLOSKAR ANGEL	0.37	0.50	25	25	2900	2500	2060	1580	1080	620	400	230

Note : Performance applicable to liquid of specific gravity 1 and viscosity as of water.



KIRLOSKAR BROTHERS LIMITED

Regd. Office : Udyog Bhavan, Tilak Road, Pune - 411 002. Tel. : (020) 4444444. Fax : (020) 4444198.

Works : Ujjain Road, Opp. Railway Station, Dewas - 455 001. Tel. : (07272) 27310-27312 Fax : (07272) 28747. E-mail : mkt@dws.kbl.co.in




As we are constantly endeavouring to improve the performance of our products / equipment, we reserve the right to make alterations from time to time, and so, our products/equipment may differ from that detailed in this publication. For latest information, you may get in touch with us.

Area Offices/ Phones : • Ahmedabad/ 6583258 • Bangalore/ 3619914 • Bhubaneshwar/ 535371 • Kolkata/ 2827619 • Chennai/ 8156546 • Indore/ 436567, 68 • Jaipur/ 361434 • Kochi/ 206651 • Lucknow/ 226494 • Mumbai/ 5289320 Nagpur/ 238178 New Delhi/ 3361485 Pune/ 5412475 Ranchi/ 308184 Secunderabad/ 7894595

ANGEL-080200



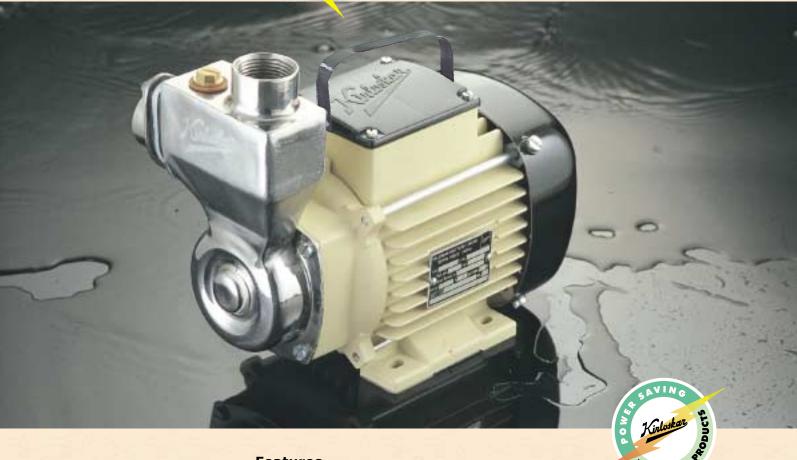

Features

- Self Priming upto 7.5 metres.

- Light weight pump for easy handing.
- Available in three attractive colours .
- Easy maintenance and spares availability.

Applications

- farm-houses etc.
- and watering for gardens.
- Circulation of water in industries.

Enriching Lives

• Withstand wide voltage fluctuations from 160 to 250 Volts.

Thermal Overload Protector (TOP)prevents motor burning.

Completely hygienic Stainless Steel delivery casing.

Powder coated aluminium motor body with Stainless Steel shaft.

 Aluminium mounting casing fitted with brass ring to avoid impeller seizing. Motor of IP-44 protection and 'B' class of insulation.

Shielded ball bearings. No need of external lubrication.

Water supply for domestic use in bungalows, apartments, hotels, hospitals,

Useful in home pressure booster systems, lawn sprinklers, overhead tanks