



CENTRIFUGAL PUMP SPECIFIC SPEED PRIMER

Jacques Chaurette p. eng., Fluide Design Inc.

April 2003

Synopsis

There is a number called the specific speed of a pump whose value tells us something about the type of pump. Is it a radial type pump which provides high head and low flow or an axial or propeller type pump which provides low flow but high head or something in between. If you are worried whether you have the right type of pump or not this number will help you decide. The article gives you an example of how to calculate this number. Also if you are worried that your pump may be cavitating there is another number related to specific speed called suction specific speed that will help you diagnose and avoid cavitation.

There is a multitude of pump designs that are available for any given task. Pump designers have needed a way to compare the efficiency of their designs across a large range of pump model and types. Pump users also would like to know what efficiency can be expected from a particular pump design. For that purpose pump have been tested and compared using a number or criteria called the specific speed (N_s) which helps to do these comparisons. The efficiency of pumps with the same specific speed can be compared providing the user or the designer a starting point for comparison or as a benchmark for improving the design and increase the efficiency. Equation [1] gives the value for the pump specific speed, H is the pump total head, N the speed of the impeller and Q the flow rate.

$$N_s = \frac{N(\text{rpm}) \times \sqrt{Q(\text{USgpm})}}{H(\text{ft fluid})^{0.75}} \quad [1]$$

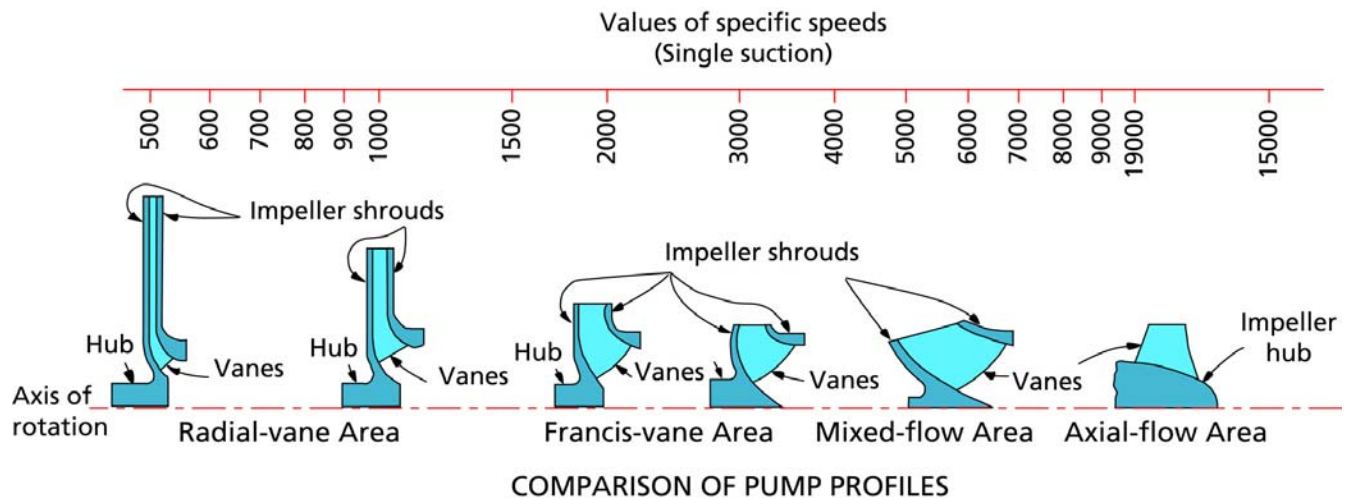


Figure 1 Specific speed values for the different pump designs.

(source: the Hydraulic Institute Standards book, see www.pumps.org)

Pumps are traditionally divided into 3 types, radial flow (see Figure 2), mixed flow (see Figure 3) and axial flow (see Figure 4). There is a continuous change from the radial flow impeller, which develops pressure principally from the action of centrifugal force, to the axial flow impeller, which develops most of its head by the propelling or lifting action of the vanes on the liquid.

Many pump types have been tested and their efficiency measured and plotted in Figure 5. Notice that larger pumps are inherently more efficient. Efficiency drops rapidly at specific speeds of 1000 or less.

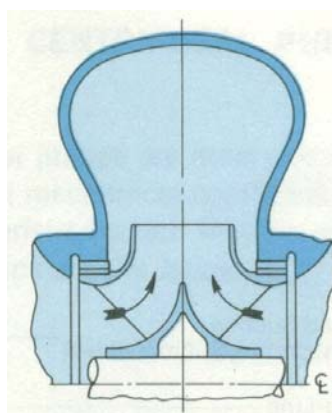


Figure 2 Radial flow pump cross-section, (source: Hydraulic Institute www.pumps.org).

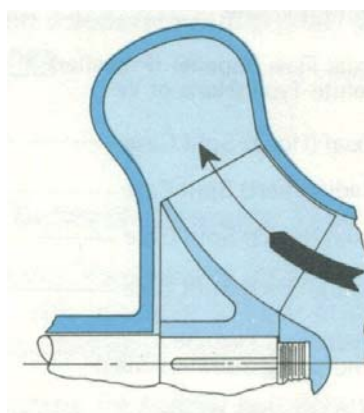


Figure 3 Mixed flow pump cross-section, (source: Hydraulic Institute www.pumps.org).




Figure 4 Axial flow pump cross-section, (source: Hydraulic Institute www.pumps.org).

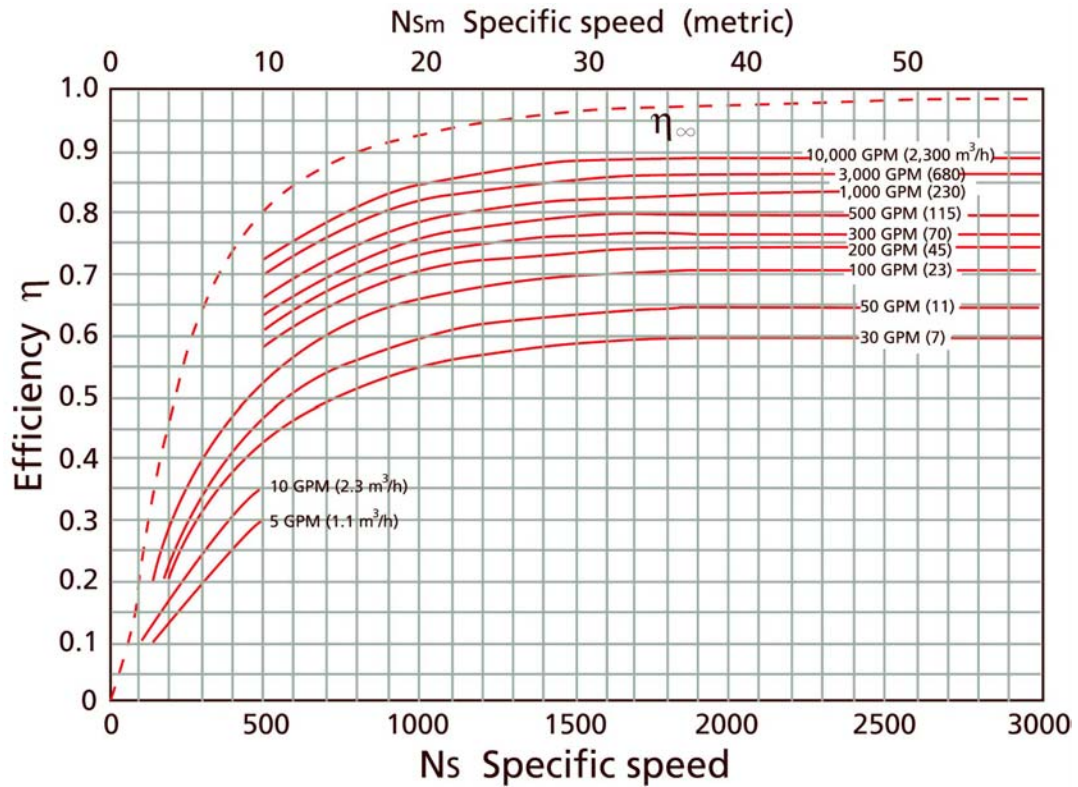


Figure 5 Efficiency values for pump with different specific speeds (source: *The Pump Handbook* published by McGraw Hill).

The following chart provides the efficiency data for pumps of various types vs the flow rate and maybe easier to read than Figure 5. However some corrections are required (use the chart in the upper left corner of Figure 6) to the values predicted.

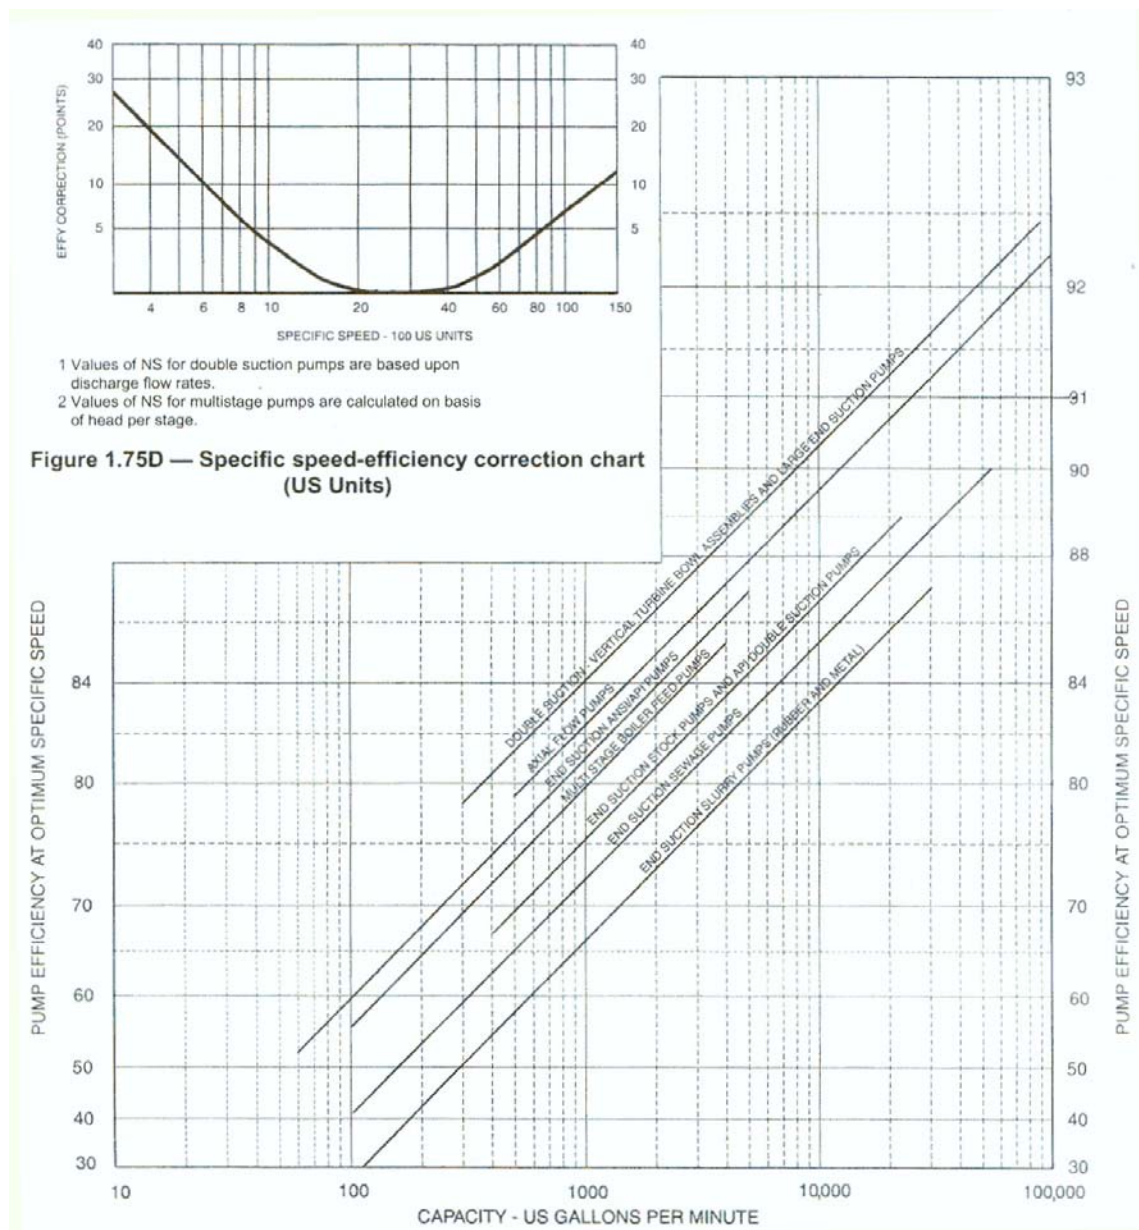


Figure 6 Efficiency values for pumps of different types (source: The Hydraulic Institute www.pumps.org).

Let's take an example, we have selected a Goulds pump Model 3175 which will provide us with a head of 97 feet at a flow rate of 500 USgpm, what is the specific speed? The efficiency of this pump according to the Goulds performance curve (see Figure 6) is 71.5%.

The chart in Figure 5 predicts that the efficiency should be 78% for a specific speed of 1266, this is a fair difference, perhaps Goulds would suggest another pump as an alternative.

$$N_s = \frac{N(\text{rpm}) \times \sqrt{Q(\text{USgpm})}}{H(\text{ft fluid})^{0.75}} = \frac{1750 \times \sqrt{500}}{97^{0.75}} = 1266 \quad [2]$$

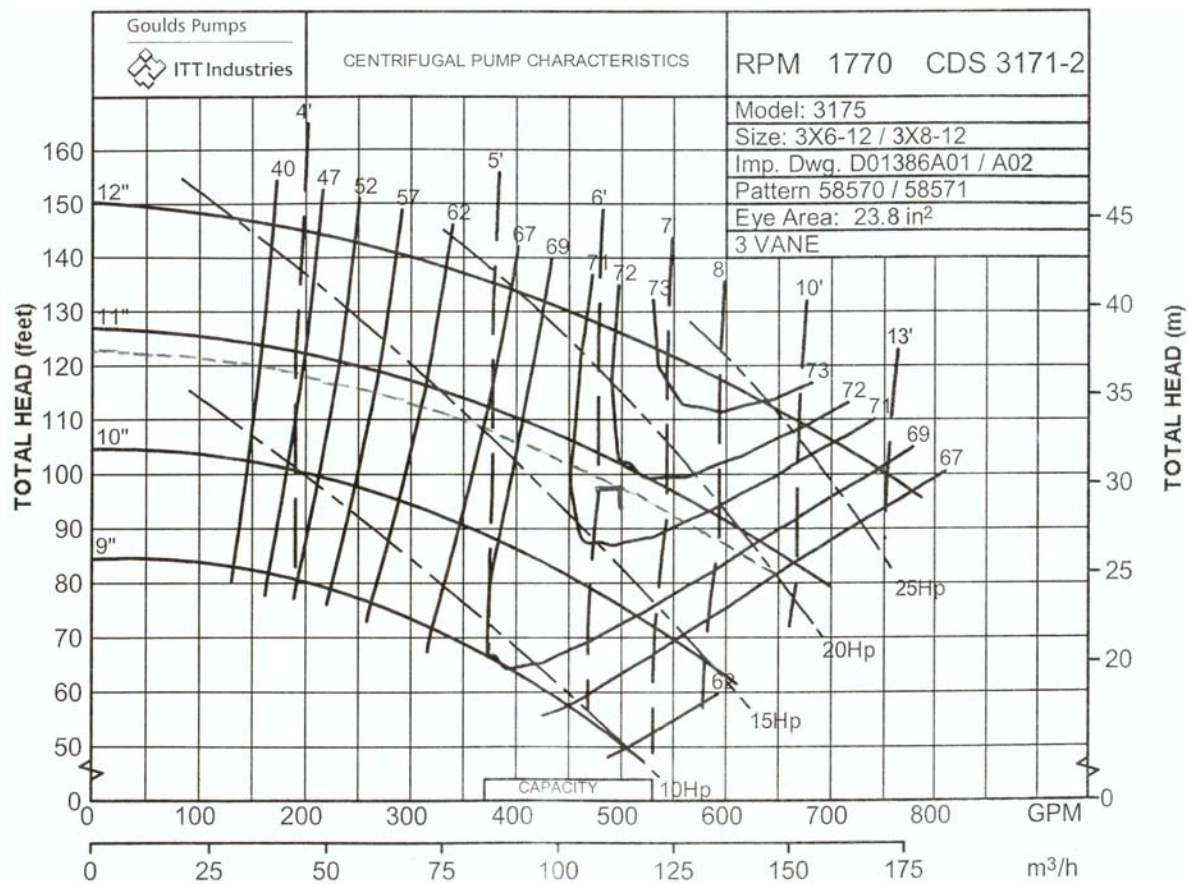


Figure 7 Goulds characteristic curves for a model 3175 3X6-12 pump at 1770 rpm (from the Goulds pump catalogue).

SUCTION SPECIFIC SPEED

Suction specific speed is a number that is dimensionally similar to the pump specific speed and is used as a guide to prevent cavitation.

$$N_s = \frac{N(\text{rpm}) \times \sqrt{Q(\text{USgpm})}}{N.P.S.H._A(\text{ft fluid})^{0.75}} \quad [3]$$

Instead of using the total head of the pump H , the N.P.S.H._A (Net Positive Suction Head available) is used. Also if the pump is a double suction pump then the flow value to be used is one half the total pump output.

From the previous article on cavitation, the N.P.S.H._A at the pump suction is :

$$N.P.S.H._{avail.}(ft \text{ fluid } absol.) = -(\Delta H_{F1-S} + \Delta H_{EQ1-S}) + \frac{v_1^2}{2g} + (z_1 - z_s + H_1) + H_A - H_{va} \quad [4]$$

where H_A and H_{va} are in feet of fluid. Equation [4] requires that the piping (ΔH_{F1-S}) friction loss and equipment friction loss (ΔH_{EQ1-S}) be calculated. The meaning of some of the variables in equation [4] are shown in Figure 8.

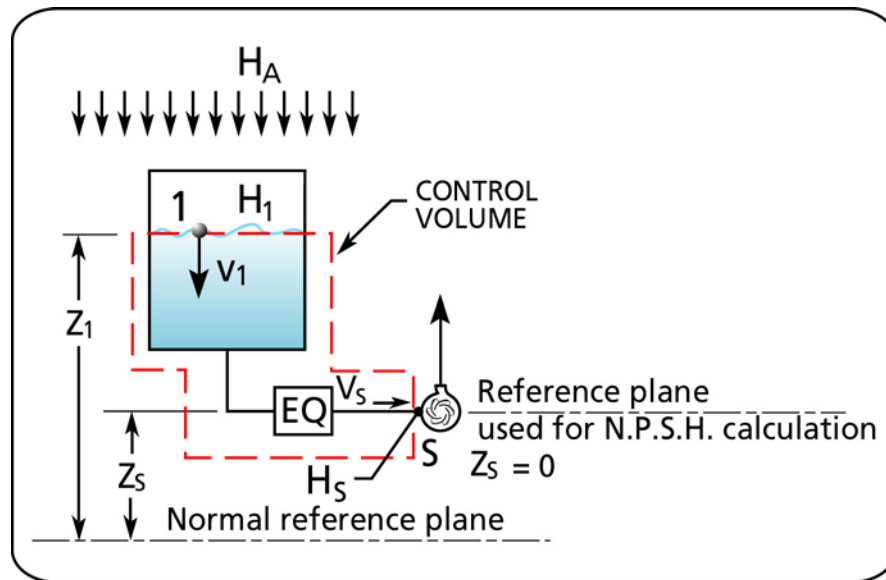


Figure 8 Meaning of the variables used for calculating the N.P.S.H._A.

We can avoid doing the calculations for equation [4] by measuring the N.P.S.H.. The value for the N.P.S.H._A can be deduced by taking a pressure measurement at the pump inlet and using equation [5]

$$N.P.S.H._{avail}(ft \text{ fluid } absol.) = 2.31 \frac{p_{gs} (psig)}{SG} + z_{gs} - z_s + \frac{v_s^2}{2g} + H_A + H_{va} \quad [5]$$

The meaning of some of the variables in equation [5] are shown in Figure 9.

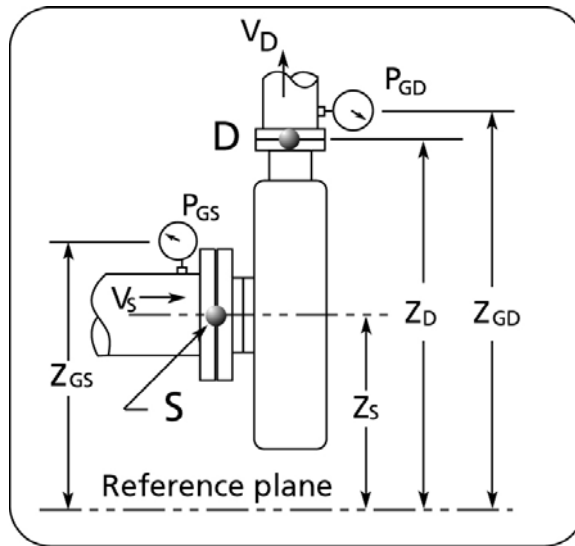


Figure 9 Location of variables for measuring N.P.S.H._A.

We may be considering an increase in the pump's speed to increase the flow rate. If so, be aware that an increase in speed will also require an increase in N.P.S.H. required. The suction specific speed value give us an indication of what the impeller speed limitation will be for a given N.P.S.H._A. The Hydraulic Institute recommends that the suction specific speed be limited to 8500 to avoid cavitation.

In the previous example the N.P.S.H._A of the pump was determined to be 15 feet absolute. Therefore the suction specific speed will be 5130.

$$N_s = \frac{N(\text{rpm}) \times \sqrt{Q(\text{USgpm})}}{N.P.S.H._A(\text{ft fluid})^{0.75}} = \frac{1750 \times \sqrt{500}}{15^{0.75}} = 5130 \quad [6]$$

This is well below 8500. We can easily calculate the new suction specific speed if we were to change the impeller speed.

Symbols

Variable nomenclature		Imperial system (FPS units)	Metric system (SI units)
g	acceleration due to gravity: 32.17 ft/s ²	ft/s ² (feet/second squared)	m/s ² (meter/second squared)
N _s	specific speed	non-dimensional	non-dimensional
S	suction specific speed	non-dimensional	non-dimensional
H	head	ft (feet)	m (meter)
N.P.S.H.	Net Positive Suction Head		
ΔH _{EQ}	equipment head difference	ft (feet)	m (meter)
ΔH _F	friction head difference	ft (feet)	m (meter)
p	pressure	psi (pound per square inch)	kPa (kiloPascal)
SG	specific gravity; ratio of the fluid density to the density of water at standard conditions	non-dimensional	
Q	flow rate	USgpm (US gallon per minute)	Cubic meters per hour
N	impeller speed	rpm	
v	velocity	ft/s (feet/second)	m/s (meter/second)
z	vertical position	ft (feet)	m (meter)