

APPENDIX C

THE DETERMINATION OF SLURRY DENSITY BASED ON THE VOLUME AND
WEIGHT CONCENTRATION OF THE SOLID PARTICLES

APPENDIX C

THE DETERMINATION OF SLURRY DENSITY BASED ON THE VOLUME AND WEIGHT CONCENTRATION OF THE SOLID PARTICLES

This section explains how the specific gravity of a slurry (SG_M) is related to the solid's particle weight and volume concentration.

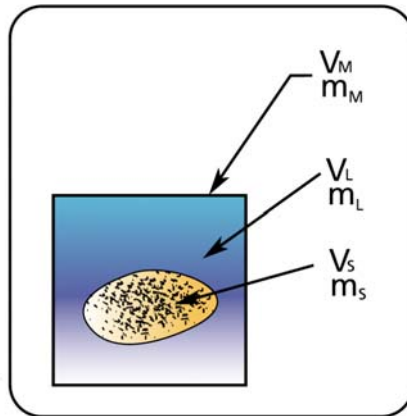


Figure C-1 Variables related to the calculation of the specific gravity of a slurry.

Definitions:

V_M is the volume the slurry mixture.

m_M is the mass of the slurry mixture.

V_L is the volume of the liquid portion of the mixture.

m_L is the mass of the liquid portion of the mixture.

V_S is the volume of the solid portion of the mixture.

m_S is the mass of the solid portion of the mixture.

C_V is the volume concentration of the solid particles in the mixture.

C_W is the mass concentration of the solid particles in the mixture.

SG_S is the specific gravity of the solids portion of the mixture.

SG_L is the specific gravity of the liquid portion of the mixture.

SG_M is the specific gravity of the mixture.

ρ_w is the density of water at standard conditions.

The total mass of the solid particles (m_S) is:

$$m_s = \rho_s V_s \quad [C-1]$$

The density of the solid particles ρ_s can be expressed as:

$$\rho_s = SG_s \rho_w \quad [C-2]$$

The volume concentration of the solid particles is expressed by:

$$V_s = C_V V_M \quad [C-3]$$

By replacing equations [C-2] and [C-3] into equation [C-1] we obtain the total mass of the solid particles m_s :

$$m_s = SG_S \rho_w C_V V_M \quad [C-4]$$

Using a similar reasoning, the total mass of the liquid particles m_L is:

$$m_L = SG_L \rho_w (1 - C_V) V_M \quad [C-5]$$

Therefore, the total mass of the mixture m_M is:

$$m_M = m_s + m_L = SG_S \rho_w C_V V_M + SG_L \rho_w (1 - C_V) V_M \quad [C-6]$$

After simplification equation [C-6] becomes:

$$m_M = \rho_w V_M (SG_S C_V + (1 - C_V) SG_L) \quad [C-7]$$

By definition, the specific gravity of the mixture is:

$$SG_M = \frac{\rho_M}{\rho_w} = \frac{m_M}{V_M \rho_w} = \frac{m_s + m_L}{V_M \rho_w} = \frac{\rho_w V_M (SG_S C_V + (1 - C_V) SG_L)}{V_M \rho_w} \quad [C-8]$$

After simplification equation [C-8] becomes:

$$SG_M = SG_L + C_V (SG_S - SG_L) \quad [C-9]$$

The specific gravity of the mixture SG_M was expressed in equation [C-8] as:

$$SG_M = \frac{m_s + m_L}{V_M \rho_w} \quad [C-10]$$

From equation [C-4] we know that:

$$\rho_w V_M = \frac{m_s}{SG_S C_V} \quad [C-11]$$

By substituting equation [C-11] into [C-10] we obtain:

$$SG_M = \frac{m_S + m_L}{\frac{m_S}{SG_S C_V}} = SG_S C_V \frac{m_S + m_L}{m_S} \quad [C-12]$$

By definition:

$$C_W = \frac{m_S}{m_S + m_L} \quad [C-13]$$

Therefore

$$SG_M = SG_S \frac{C_V}{C_W} \quad [C-14]$$

Typically the concentration by volume (C_V), the concentration by weight (C_W) and the specific gravity (SG_S) of the solid particles will be given or known for a particular slurry. This is enough information to calculate the specific gravity of the slurry (SG_M) using equation [C-14]. The specific gravity of the carrier fluid can be calculated from equation [C-9] if required.

Often the purpose of the slurry mixture is to transport solid particles in a fluid form to a discharge point further away. In that case, we are mainly interested in the amount of tons per hour of solids that are transported.

The mass flow rate is given by:

$$M = \rho_s C_V q = SG_S \rho_w C_V q$$

$$M\left(\frac{tn}{h}\right) = SG_S \times \frac{62.34 lbm}{ft^3} \times C_V \times q\left(\frac{USgals.}{min}\right) \times \frac{60 min}{h} \times \left(\frac{ft^3}{7.48 USgals.}\right) \times \frac{tn}{2000 lbm}$$

After simplification, the mass flow rate is:

$$M\left(\frac{tn}{h}\right) = 0.25 SG_S C_V q\left(\frac{USgals.}{min}\right) \quad [C-15]$$