

# HYDROMATIC®

## P33A1

### Pedestal Sump Pump

- Basement Sump Draining
- Industrial Circulators
- Transfer Tanks
- Dependable 1/3 HP motor pumps up to 40 GPM at 10' total dynamic head. Discharge is 1-1/4" N.P.T.
- Easily adjustable pumping range.
- Non-corrosive volute/base and impeller.
- Automatic reset thermal overload protection.



# P33A1 - Pedestal Sump Pump

## Details


### Pump Characteristics

Pump/Motor Unit	Upright
Pump Models	P33A1
Horsepower	1/3
Full Load Amps	5.7
Motor Type	Split Phase
R.P.M.	1625
Phase Ø	1
Voltage	115
Hertz	60
Operation	Intermittent
Temperature	140° F Ambient
NEMA Design	A
Insulation	Class B
Discharge Size	1-1/4" NPT
Solids Handling	1/8"
Unit Weight	11 lbs.
Power Cord	16/3, SJT, 8'


### Materials of Construction

Pump Casing	Thermoplastic
Shaft	Thermoplastic
Impeller	Thermoplastic
Bearing	Barthane
Base	Thermoplastic
Fasteners	Stainless Steel
Float	Plastic

### Performance Data

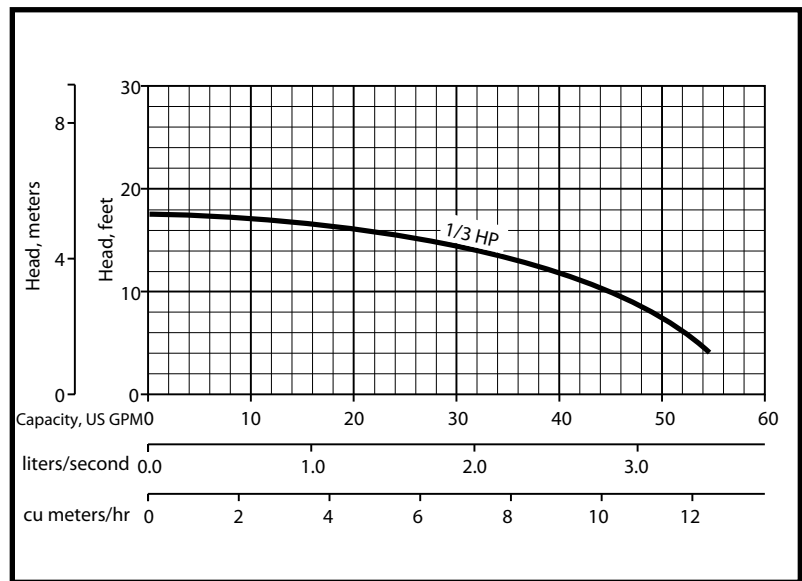

### Dimensional Data

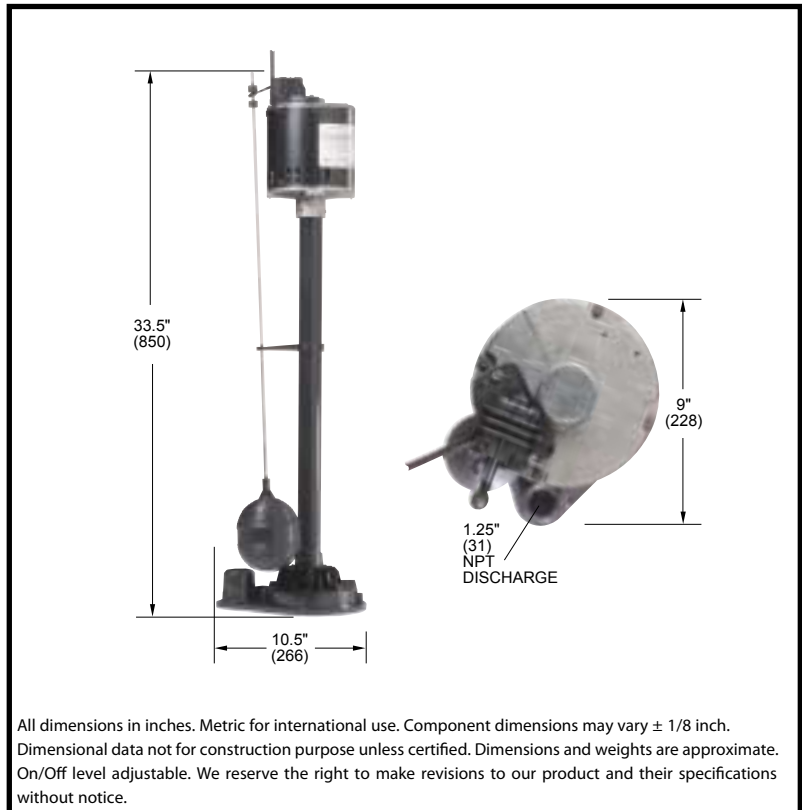

**Pentair Pump Group**

1840 Baney Road Ashland, Ohio 44805  
 Tel: 419-289-3042 Fax: 419-281-4087  
[www.hydromatic.com](http://www.hydromatic.com)

© 1999 Hydromatic, Ashland, Ohio. All Rights Reserved.

- Your Authorized Local Distributor -